

Control Units

MSE-100 | MSE-300 | MSE-400 | MSE-500



RIEZLER Inspektionssysteme GmbH & Co. KG

Sportplatzweg 5 | 87471 Durach | Germany
Tel. +49 (831) 27714 | info@riezler.eu | www.riezler.eu

RIEZLER

Specifications control units

| | MSE-100 | MSE-300 | MSE-400 | MSE-500 |
|---|----------------------------|----------------------------|----------------------------|--------------------|
| High-resolution, bright TFT display | 5,6 Inch | 8 Inch | 10 Inch | 12,4 Inch |
| Integrated Video Recorder with snapshot function | ✓ | ✓ | ✓ | ✓ |
| Reporting software | ✗ | ✗ | ✓ | ✓ |
| Integrated digital meter counter with overlay for sensor values | ✓ | ✓ | ✓ | ✓ |
| Text generator | ✗ | ✓ | ✓ | ✓ |
| Li-Ion battery | ✓ | ✓ | ✓ | ✗ |
| 12 V jack for car operation | ✓ | ✓ | ✓ | ✗ |
| Dimensions (L x W x H) | 270 x 120 x 245 mm | 350 x 190 x 315 mm | 350 x 180 x 315 mm | 490 x 380 x 290 mm |
| Weight | ca. 2,4 kg | ca. 4,5 kg | ca. 5,5 kg | ca. 10 kg |
| Power supply | 12-24 V DC 110-240 V AC | 12-24 V DC 110-240 V AC | 12-24 V DC 110-240 V AC | 110-240 V AC |

MSE-100 / MSE-300

Our control units MSE-100 and MSE-300 are compatible with all our cameras, reels and manual cable drums. They allow simple video and picture recording during inspections. An easy and pleasant handling is guaranteed due to ergonomically arranged control elements. Furthermore, high-resolution TFT displays are integrated that are completely daylight suitable and grant brilliant picture quality in every environment. The compact design and powerful Li-Ion batteries make both control units extremely mobile.

The MSE-100 possesses a 5.6 inch big TFT display. An optional remote control allows it to even operate pan and tilt cameras. The MSE-300 inherently offers this possibility and features an even bigger 8 inch TFT-display.


MSE-400 / MSE-500

The MSE-400 and MSE-500 are equipped with the latest PC components and our proprietary RiVision software. This combination allows for customizable inspections including video and picture recordings. Thereby emerging data are saved on internal storage and can easily be exported via USB transfer.

Both control units feature ergonomically designed controls to operate connected components. The software is intuitively operated by touchscreen – optionally external input devices can be used as well.

In both models fully daylight suitable, high-resolution TFT displays are built-in. The MSE-400 provides a 10 inch display and a powerful Li-Ion battery. This makes it perfect for mobile use with all our cameras, reels and manual cable drums. The MSE-500 impresses with a 12.4 inch display and is compatible with all our cameras, crawlers and cable drums.

Configuration possibilities

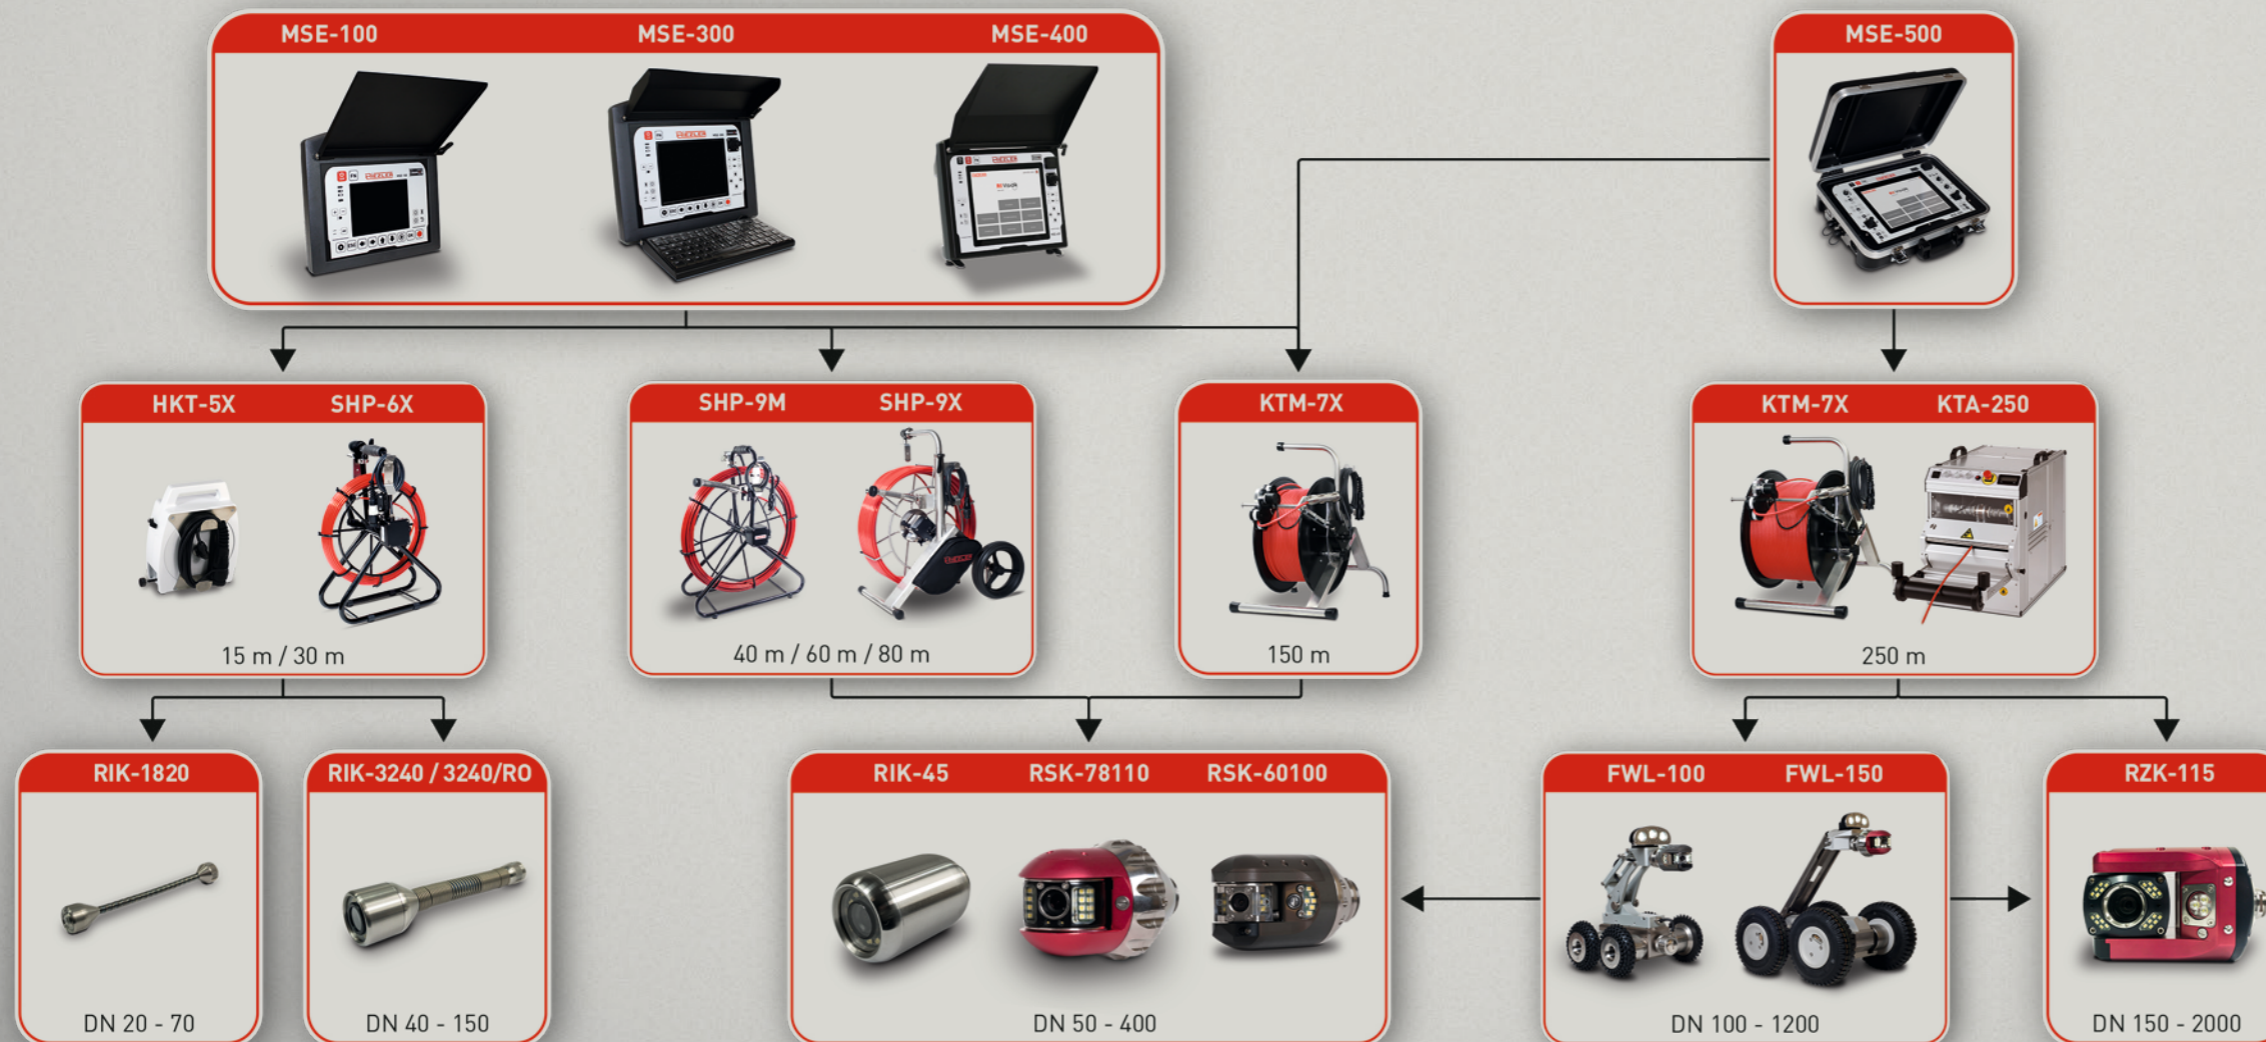

Accessories

